

FIG. 1

Prior Art

200

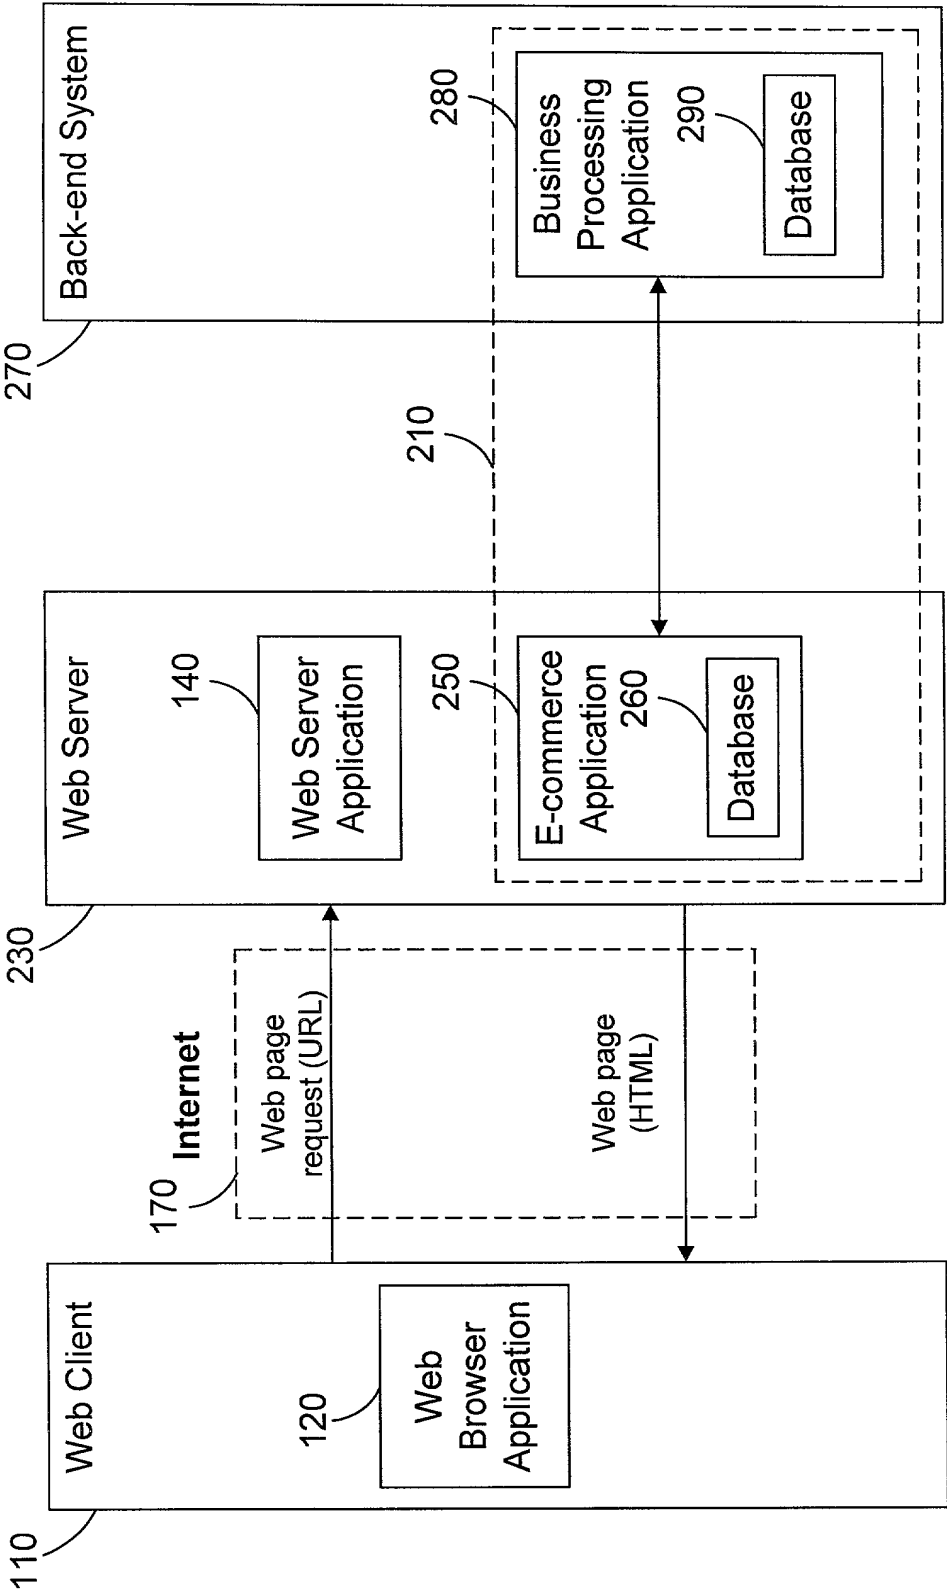


FIG. 2

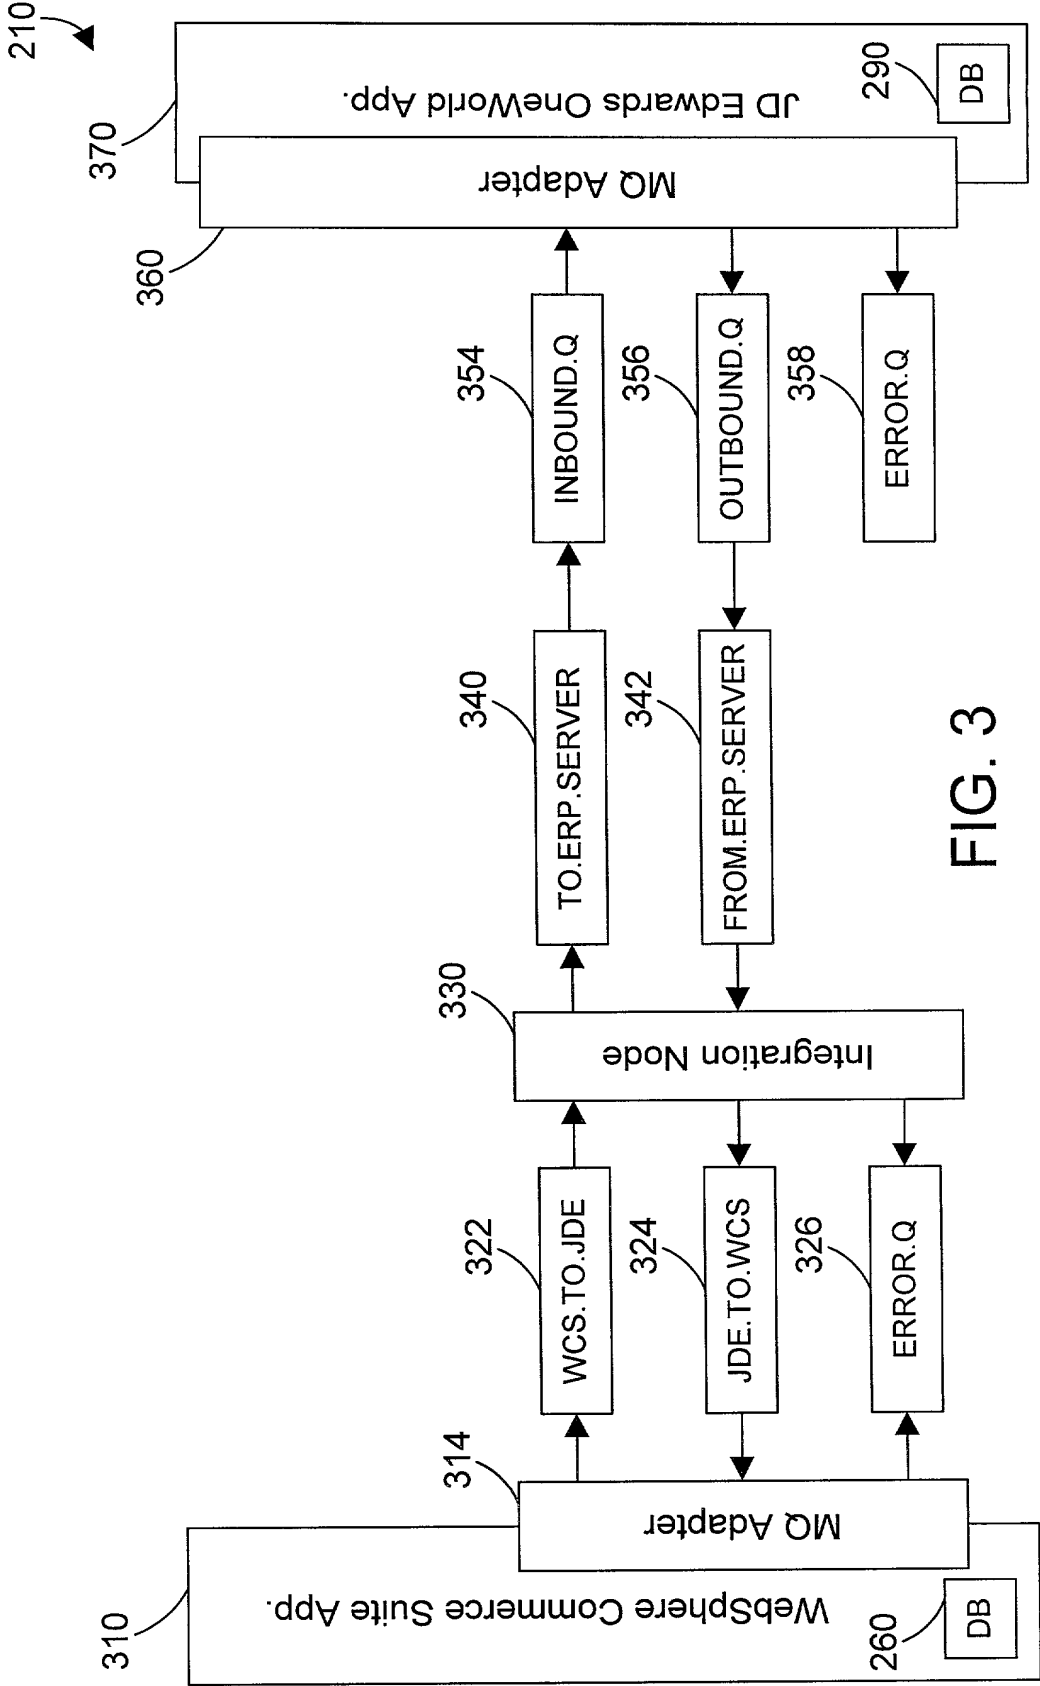


FIG. 3

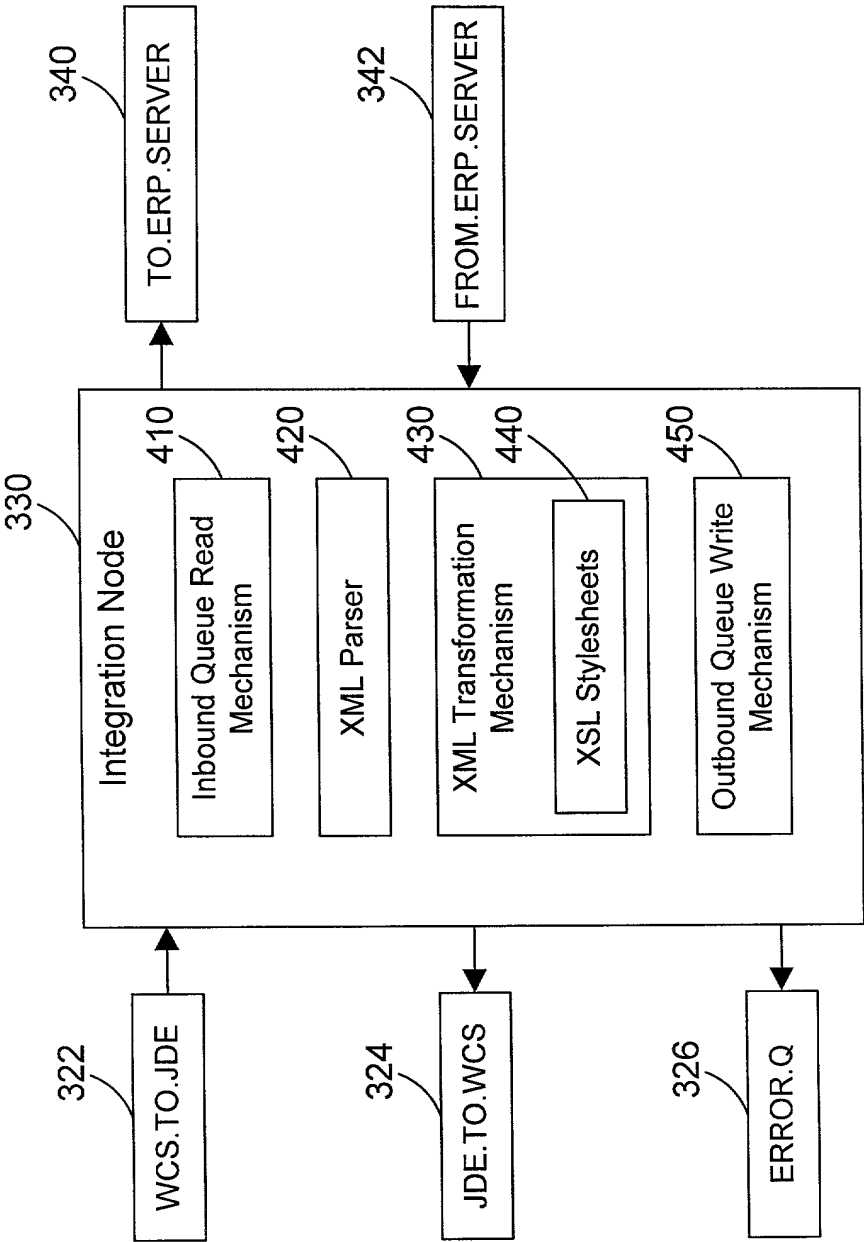


FIG. 4

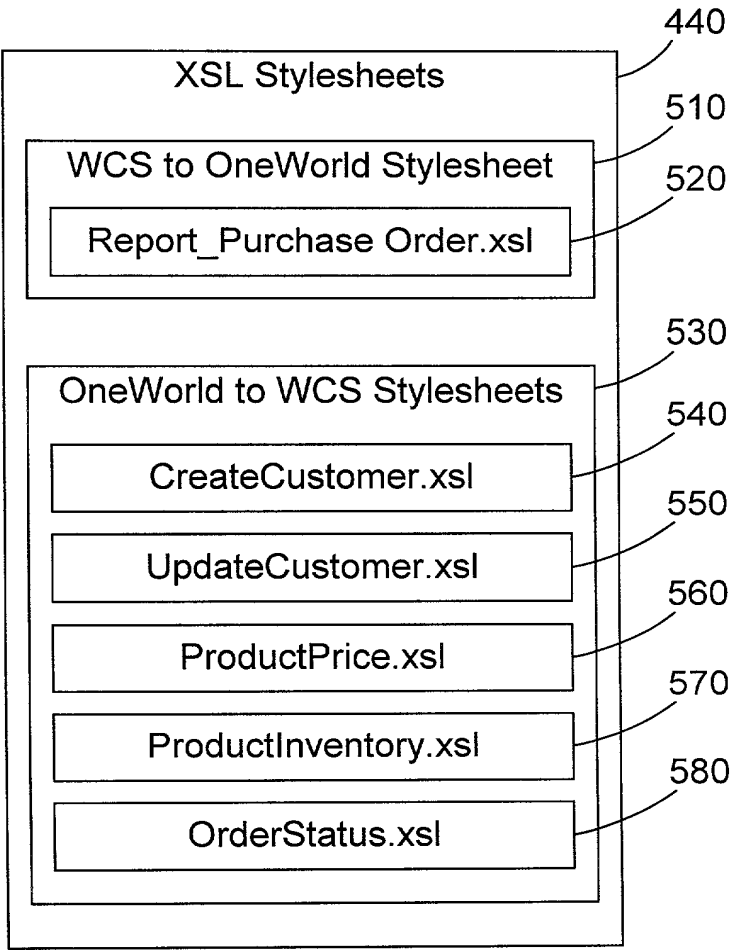


FIG. 5

OneWorld Message	WCS Message	XSL Stylesheet Name
OrderEntry	Report_NC_PurchaseOrder	Report_PurchaseOrder.xsl
CustomerNew	Create_NC_Customer	CreateCustomer.xsl
CustomerUpdate	Update_NC_Customer	UpdateCustomer.xsl
ProductPriceUpdate	Update_NC_ProductPrice	ProductPrice.xsl
ProductQuantityUpdate	Update_NC_ProductInventory	ProductInventory.xsl
OrderStatusUpdate	Update_NC_OrderStatus	OrderStatus.xsl

FIG. 6

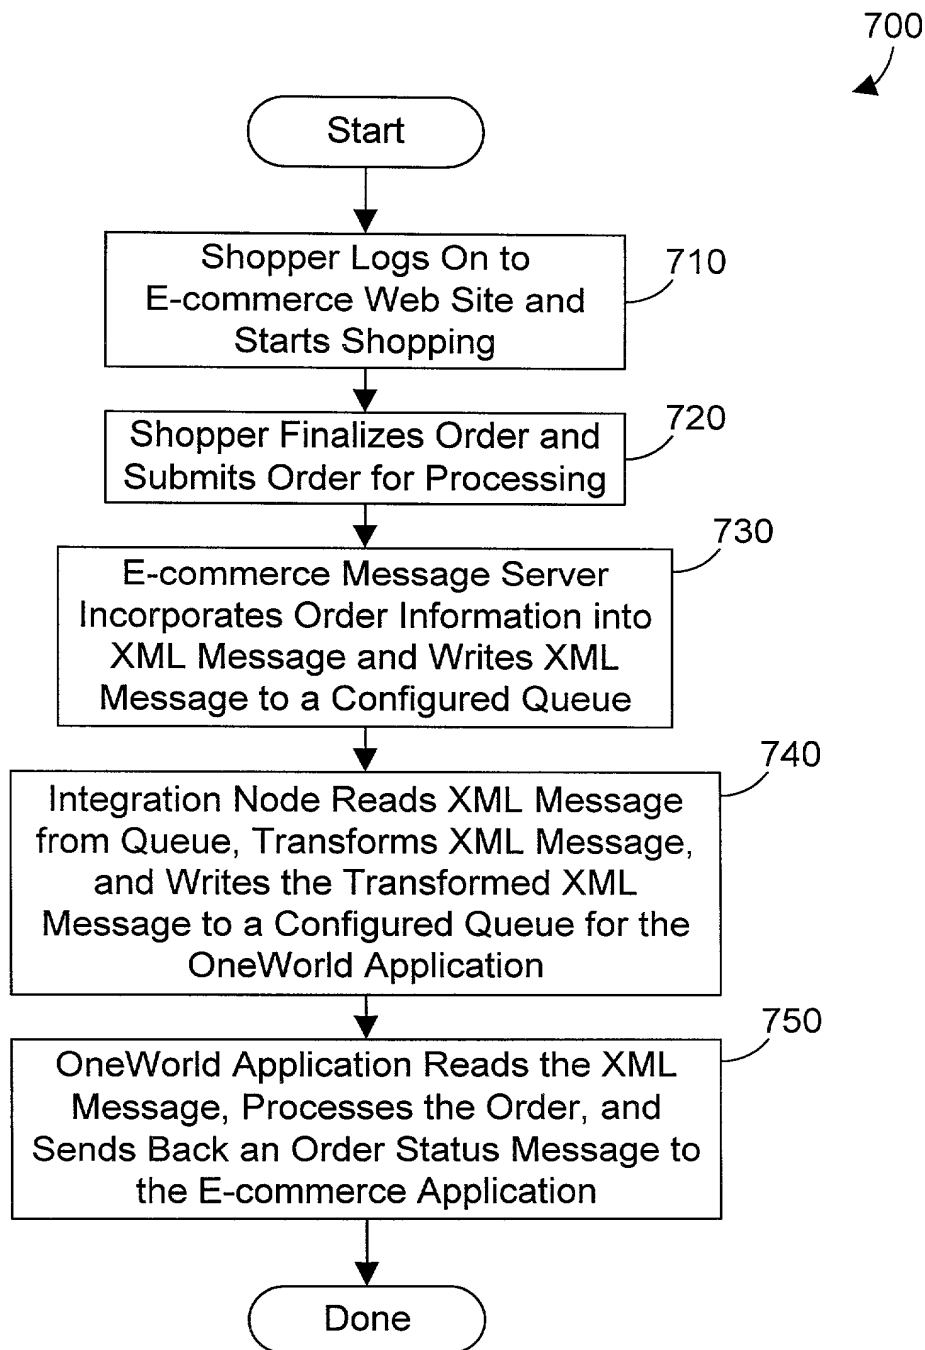


FIG. 7

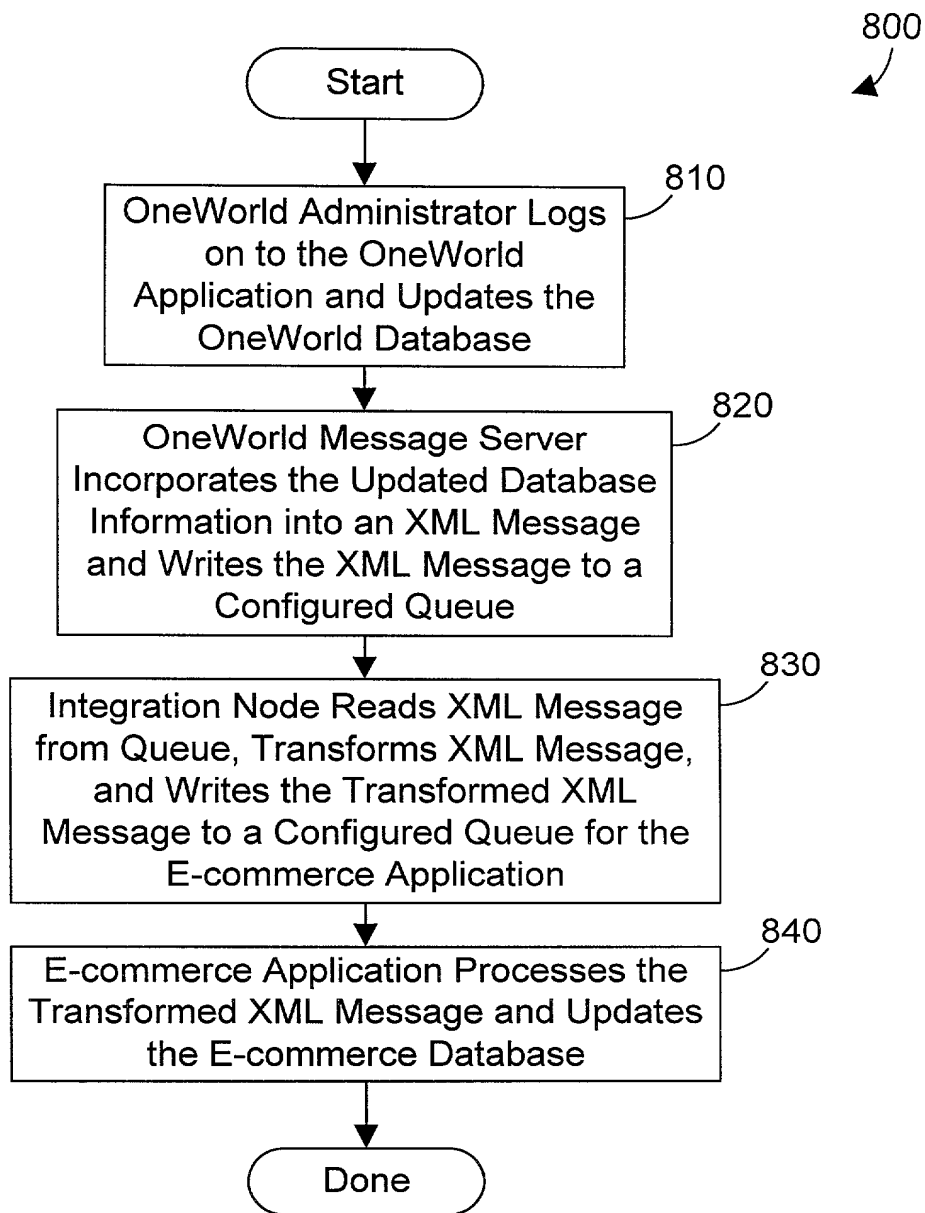


FIG. 8

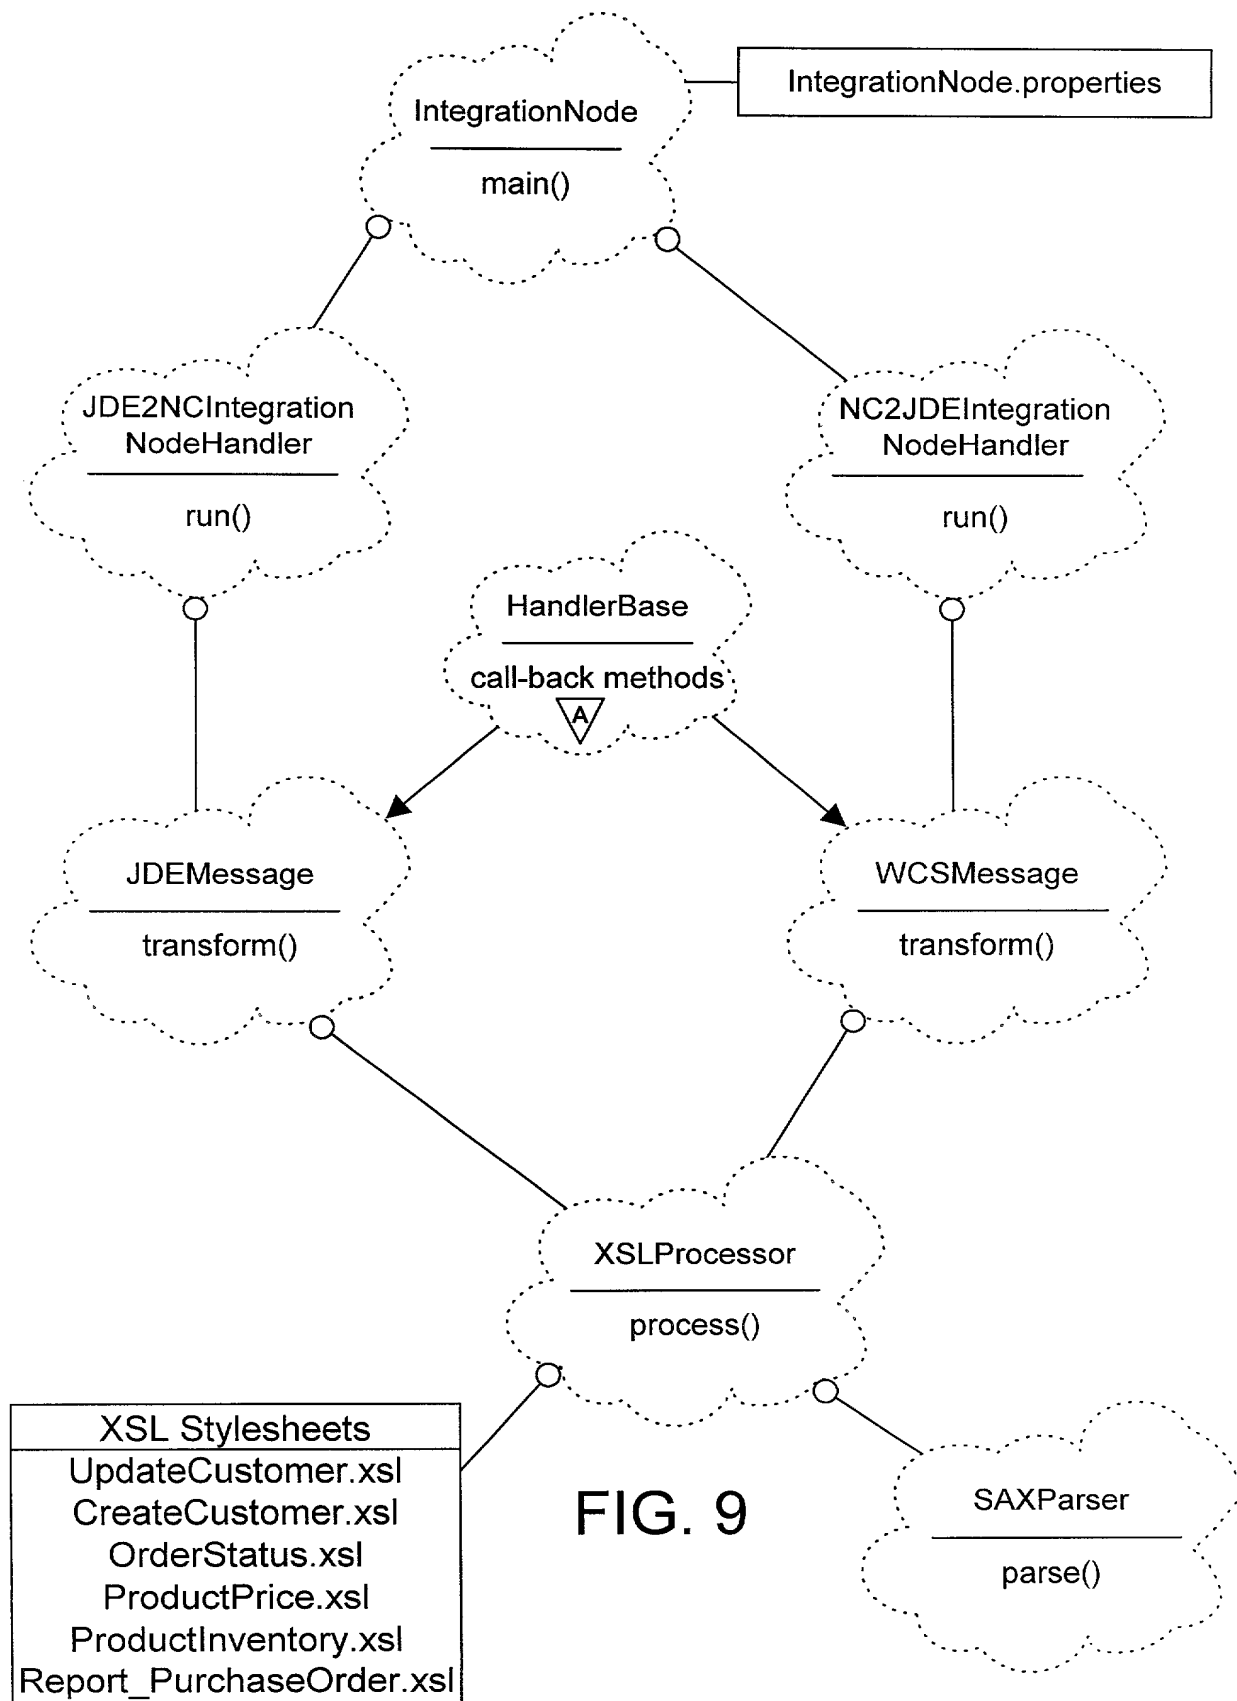


FIG. 9

IntegrationNode.properties
Maximum Number of Threads MQSeries Queue Manager Name MQSeries Inbound Queue Name MQSeries Outbound Queue Name MQSeries Error Queue Name

FIG. 10

Event	HandlerBase Call-back Method	JDEMessage Specific Action
Receive notification of the beginning of the document	startDocument	Initialize variables
Receive notification of the start of an element	startElement	Determine value of Transaction type. If Transaction type is JDEAB (customer new or customer update) perform extra parsing to determine the value fo the specific attributes.
Receive notification of character data inside an element	characters	Extract the value of specific attributes.
Receive notification of the end of an element	endElement	Exit the InTable state if this is the end of a </Table> element
Receive notification of the end of the document	endDocument	Set the appropriate variable according to the transaction type.

FIG. 11

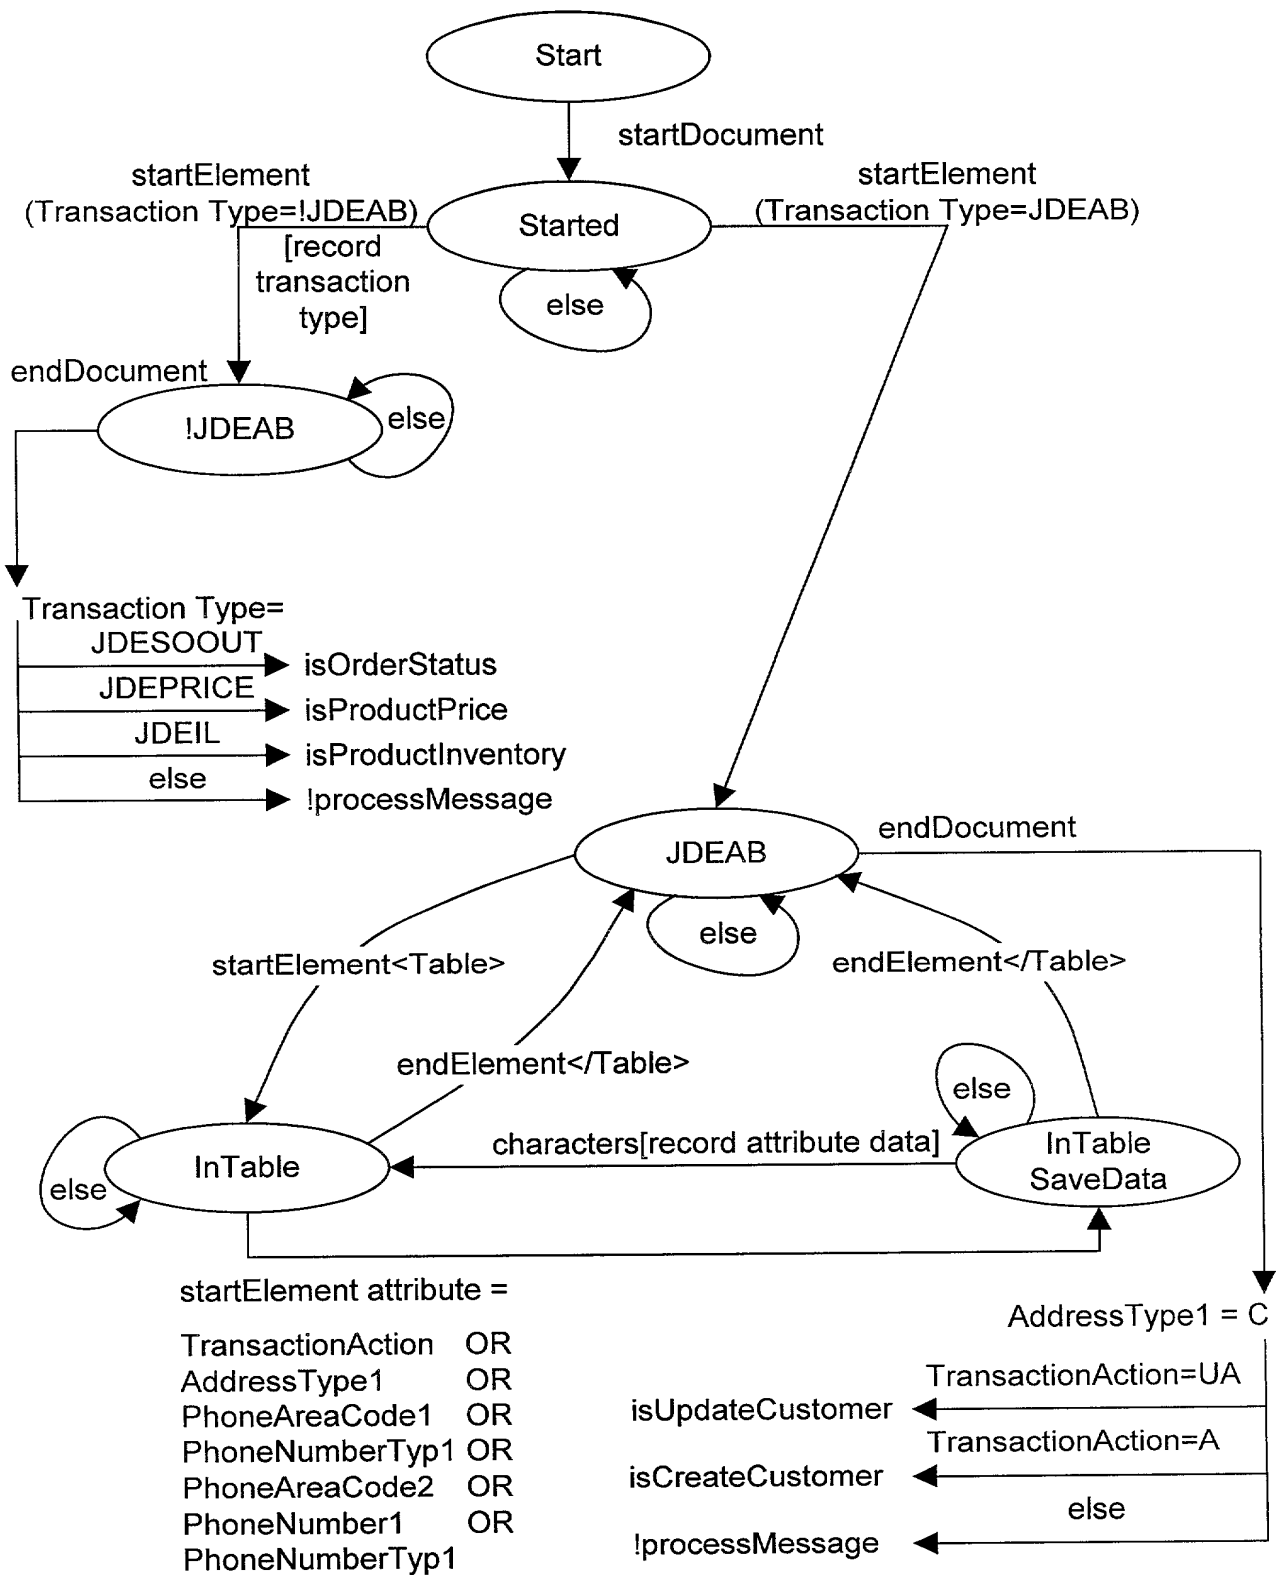


FIG. 12